

APPLICATION	W	Y
Arterial roads*	Full Pkwy.	10'
Residential sidewalk adjacent to R **	4'	10'
Residential sidewalk adjacent to curb***	4'-6"	10'
Commercial and Industrial	Full Pkwy.	10'

NOTES:

Thickness=4" PCC standard; 6" within driveway area.

CURB & GUTTER:

WPJ shall be placed at each side of driveways, at the ends of all curb returns, and at 10' intervals (except within curb returns), to a depth of 1-1/2" with edger finish.

SIDEWALK:

WPJ shall be constructed in sidewalks, 1" minimum depth, at 10' intervals and at ends of drive approaches, curb returns and tree wells. Joints shall be edger finished (R=1/8").

Color additives or pattern stamped concrete shall not be used.


*W may be reduced to 5' with adequate provision for maintenance of remaining parkway.

**Recommended where grade is less than 5% and design is consistent with adjacent residential development.

***Recommended when grade is greater than 5%. Utility vaults, hydrants, mailboxes and other obstructions must be placed back of sidewalk.

See Std. Plan No. 1410 for vertical obstruction location.

See Std. Plan No. 112-0-0C for joint details.

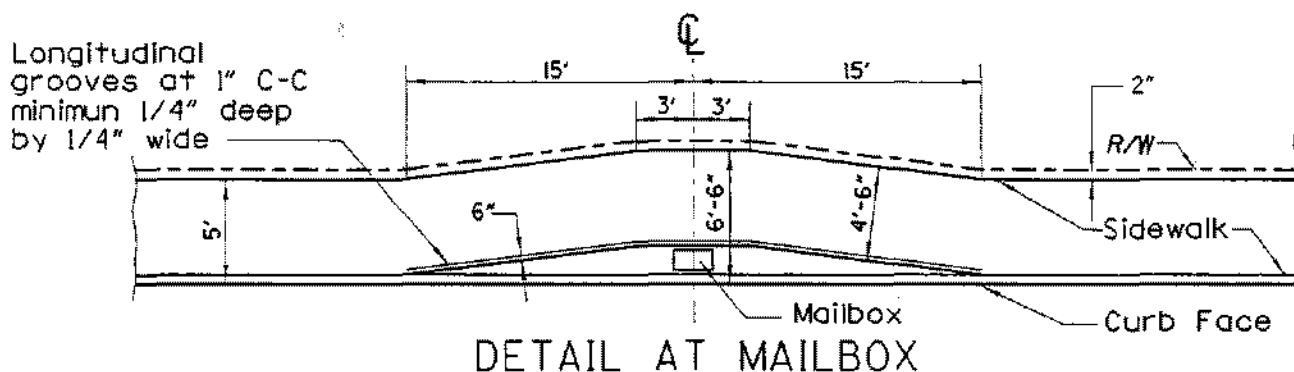

DETAIL AT MAILBOX

ORANGE COUNTY ENVIRONMENTAL MANAGEMENT AGENCY

Approved

W.L. Zaur 11-15-91
W.L. Zaur, Director of Public Works

Adopted: Res. 77-92

Revised: Res. 78-791; 82-718; 86-1141; 91-1481

STD. PLAN

1205

SIDEWALK DETAILS

SHT. 1 OF 1